


Montagedistanzen - Cognex InSight (7000 Serie)

Camera Model **In-Sight 7402**

Resolution [Pixel] 1024 1280

anyfeed Model	W [mm]	L [mm]	Lens f	A [mm]	B [mm]	C [mm]
sxm50	50	62.5	50mm	630	768	138
			75mm	1200	1338	
sxm100	100	125	35mm	790	961	171
			50mm	1090	1261	
sxm140	150	188	25mm	805	965	160
			35mm	1100	1260	
sxm200	200	250	25mm	1040	1200	160
			35mm	1430	1590	
SX240	240	300	16mm	830	1071	241
			25mm	1240	1481	
SX340	340	425	16mm	1125	1380	255
			25mm	1700	1955	

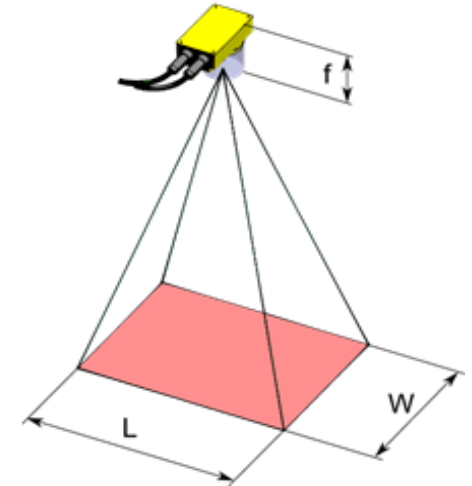

Camera Model **In-Sight 7200**

Resolution [Pixel] 600 800

anyfeed Model	W [mm]	L [mm]	Lens f	A [mm]	B [mm]	C [mm]
sxm50	50	66.7	35mm	695	833	138
			50mm	950	1088	
sxm100	100	133.3	25mm	918	1089	171
			35mm	1245	1416	
sxm140	150	200.0	16mm	865	1025	160
			25mm	1310	1470	
sxm200	200	266.7	12.5mm	900	1060	160
			16mm	1130	1290	
SX240	240	320	12.5mm	1060	1301	241
			16mm	1330	1571	
SX340	340	453.3	12.5mm	1450	1705	255
			16mm	1830	2085	

