


## Montagedistanzen - Cognex InSight (7800 Serie)

Camera Model **In-Sight 7801**  
Resolution [Pixel] 1024 1280 (1.3 Megapixel)

anyfeed Model	W [mm]	L [mm]	Lens f	A [mm]	B [mm]	C [mm]
sxm50	50	62.5	50mm	<b>715</b>	853	138
			75mm	1200	1338	
sxm100	100	125	25mm	<b>670</b>	841	171
			35mm	<b>910</b>	1081	
sxm140	150	188	25mm	<b>940</b>	1100	160
			35mm	<b>1290</b>	1450	
sxm200	200	250	16mm	850	1010	160
			25mm	<b>1290</b>	1450	
SX240	240	300	16mm	965	1206	241
			25mm	<b>1470</b>	1711	
SX340	340	425	12.5mm	1055	1310	255
			16mm	<b>1330</b>	1585	

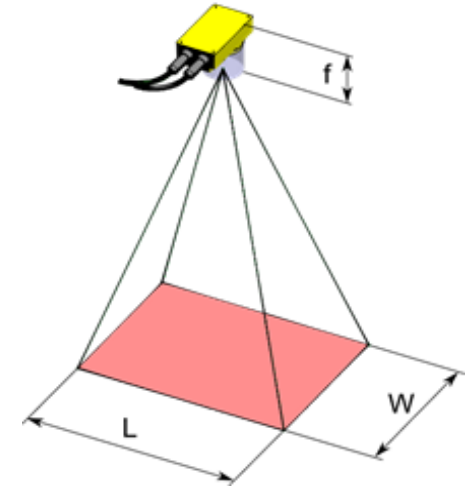

Camera Model **In-Sight 7802**  
Resolution [Pixel] 1200 1600 (2 Megapixel)

anyfeed Model	W [mm]	L [mm]	Lens f	A [mm]	B [mm]	C [mm]
sxm50	50	66.7	50mm	<b>630</b>	768	138
			75mm	1200	1338	
sxm100	100	133.3	35mm	<b>790</b>	961	171
			50mm	<b>1100</b>	1271	
sxm140	150	200.0	25mm	<b>820</b>	980	160
			35mm	<b>1120</b>	1280	
sxm200	200	266.7	25mm	<b>1110</b>	1270	160
			35mm	<b>1530</b>	1690	
SX240	240	320	16mm	840	1081	241
			25mm	<b>1270</b>	1511	
SX340	340	453.3	16mm	1150	1405	255
			25mm	<b>1760</b>	2015	

